



How to load Speakers Presets inside DA Series amps?


--

DA Series Amplifiers (DA8, DA12, DA8AES, DA12AES)


Prerequisites: The APG DA Series amplifiers & APG Speaker's Preset Bank must be installed on ArmoniaPlus 2.4 before continue.

Please follow this steps in order to load Speaker's Presets inside the On-board memory of the DA Series amplifiers:


- Connect your APG DA Series amplifier to your computer with an Ethernet cable and turn it on.
- Open ArmoniaPlus 2.4; Open a "Live Session".
- Click on the "Synchronization button"  and turn the synchronization "On". The icon must be green: . (Now all the changes made inside the ArmoniaPlus session will affect the connected amplifiers on the network).
- Click on "Match" and "Discovery" and drag & drop your amplifier to the Workspace.

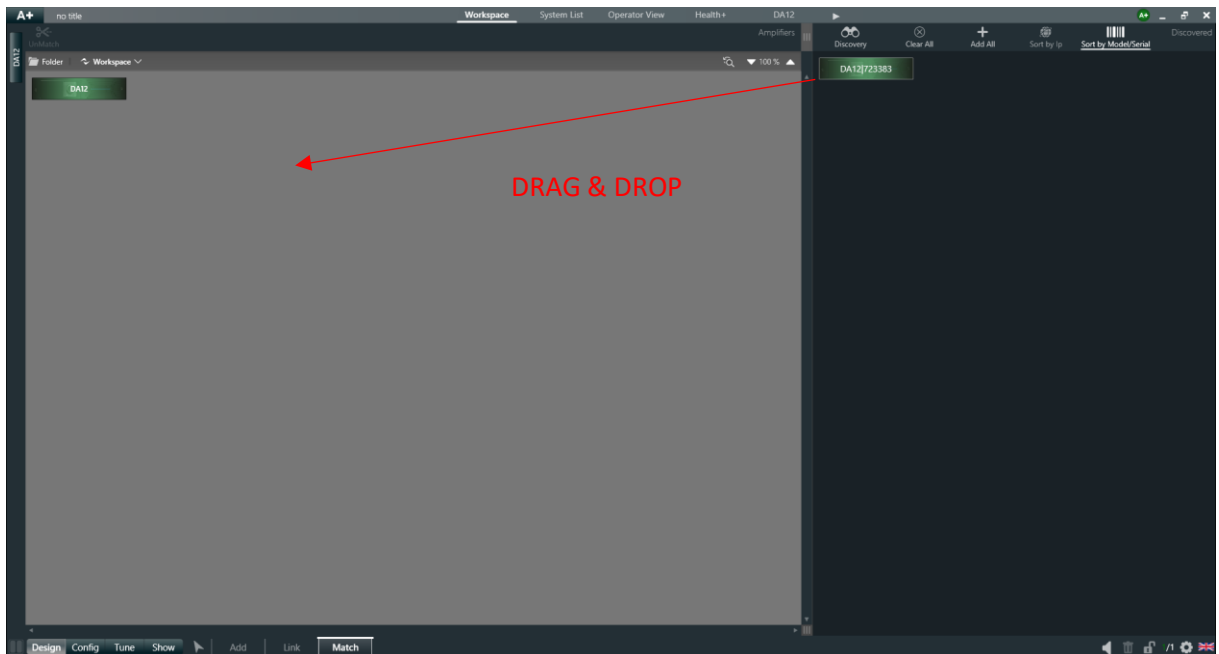

- Then click on the "Home button"  to go back to the Workspace main view.
- Click on the  menu, then click on "More/ Preset Manager".

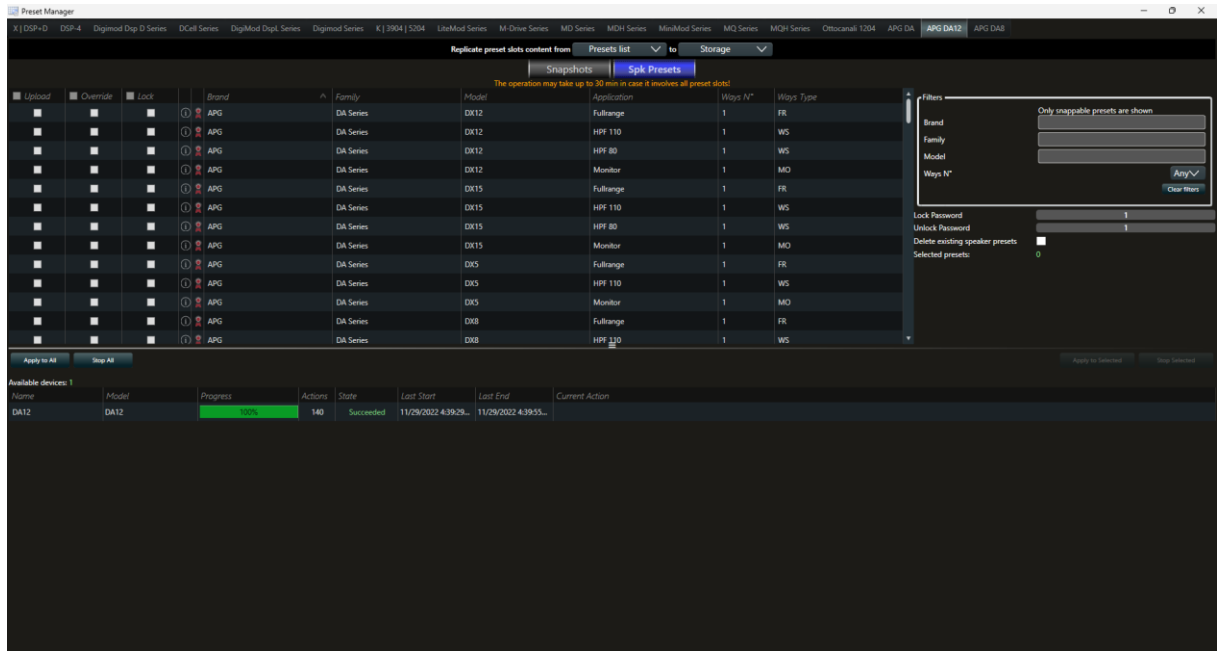

- In the Preset Manager, select your amplifier Type. Here for example is the “APG DA12”.
- Select the “Spk Presets” Tab.
- Tick all the presets in the list you want to upload in the Upload tab.

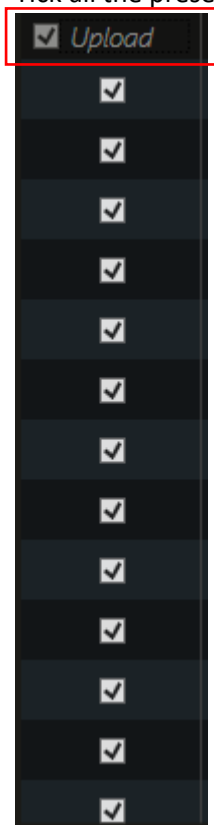

- Tick the “Delete existing speaker presets” tab:

Lock Password: 1
 Unlock Password: 1
 Delete existing speaker presets:
 Selected presets: 122

- Select the amplifier(s) in the list of “Available Devices”

Available devices: 1

Name	Model
DA12	DA12

Apply to Selected

- Click on “Apply to Selected” to launch the upload.

- Warning! The operation may take up to 30 minutes in case it involves all presets slots!

Wait for the Progress bar to be at 100% and the State to turn to “Succeeded” status to be sure that the upload is complete:

Available devices: 1

Name	Model	Progress	Actions	State	Last Start	Last End
DA12	DA12	100%	246	Succeeded	11/29/2022 5:05:06...	11/29/2022 5:05:58...

- Your APG Speaker’s Preset bank has been uploaded into the DA amplifier.